


**AP STYLE 750**

Style 750 is a unique packing combining the best of two products. It has Kevlar® corners that prevent roll and extrusion while the GFO® center provides sealing and lubricating qualities for your toughest applications. Style 750 is an excellent general service packing for severe pump applications.

Style 750 is designed for corrosive and abrasive fluids in slurries, mixers, and centrifugal and reciprocating pumps. It is widely used in power generation, paper mills, and waste treatment facilities. Style 750 is available as individual rings, combination sets, and in bulk.

**Standard Sizes**

<b>Size</b>	1/8	3/16	1/4	5/16	3/8	7/16	1/2	9/16	5/8	3/4	7/8	1
<b>Ft/Lb</b>	N/A	N/A	23	16	10.8	8.5	5.8	4.8	3.9	2.6	2.1	1.2

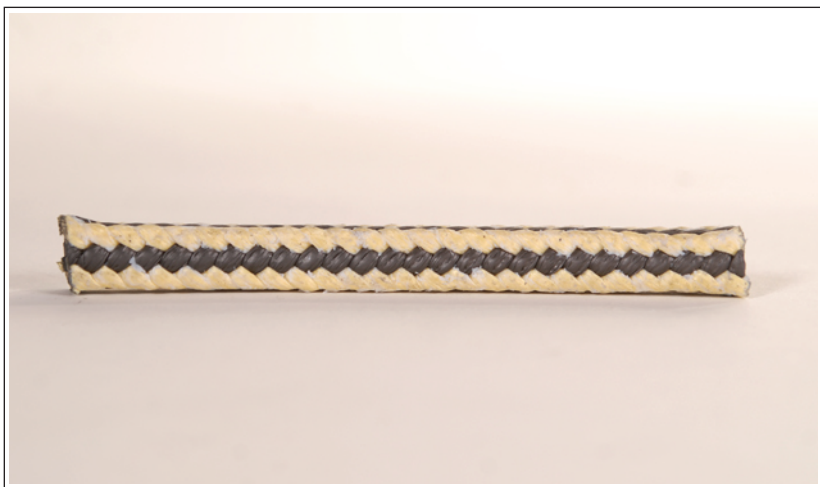

**SPECIFICATIONS**

**Maximum Temperature**  
**550° F**

**Maximum Pressure**  
**300 PSI**

**Maximum Shaft Speed**  
**2500 FPM**

**Ph Range**  
**2-12**

**Construction**  
**Lattice Braid**

**CONTACT US**



724.295.6200



sales@apservicesinc.com